


Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

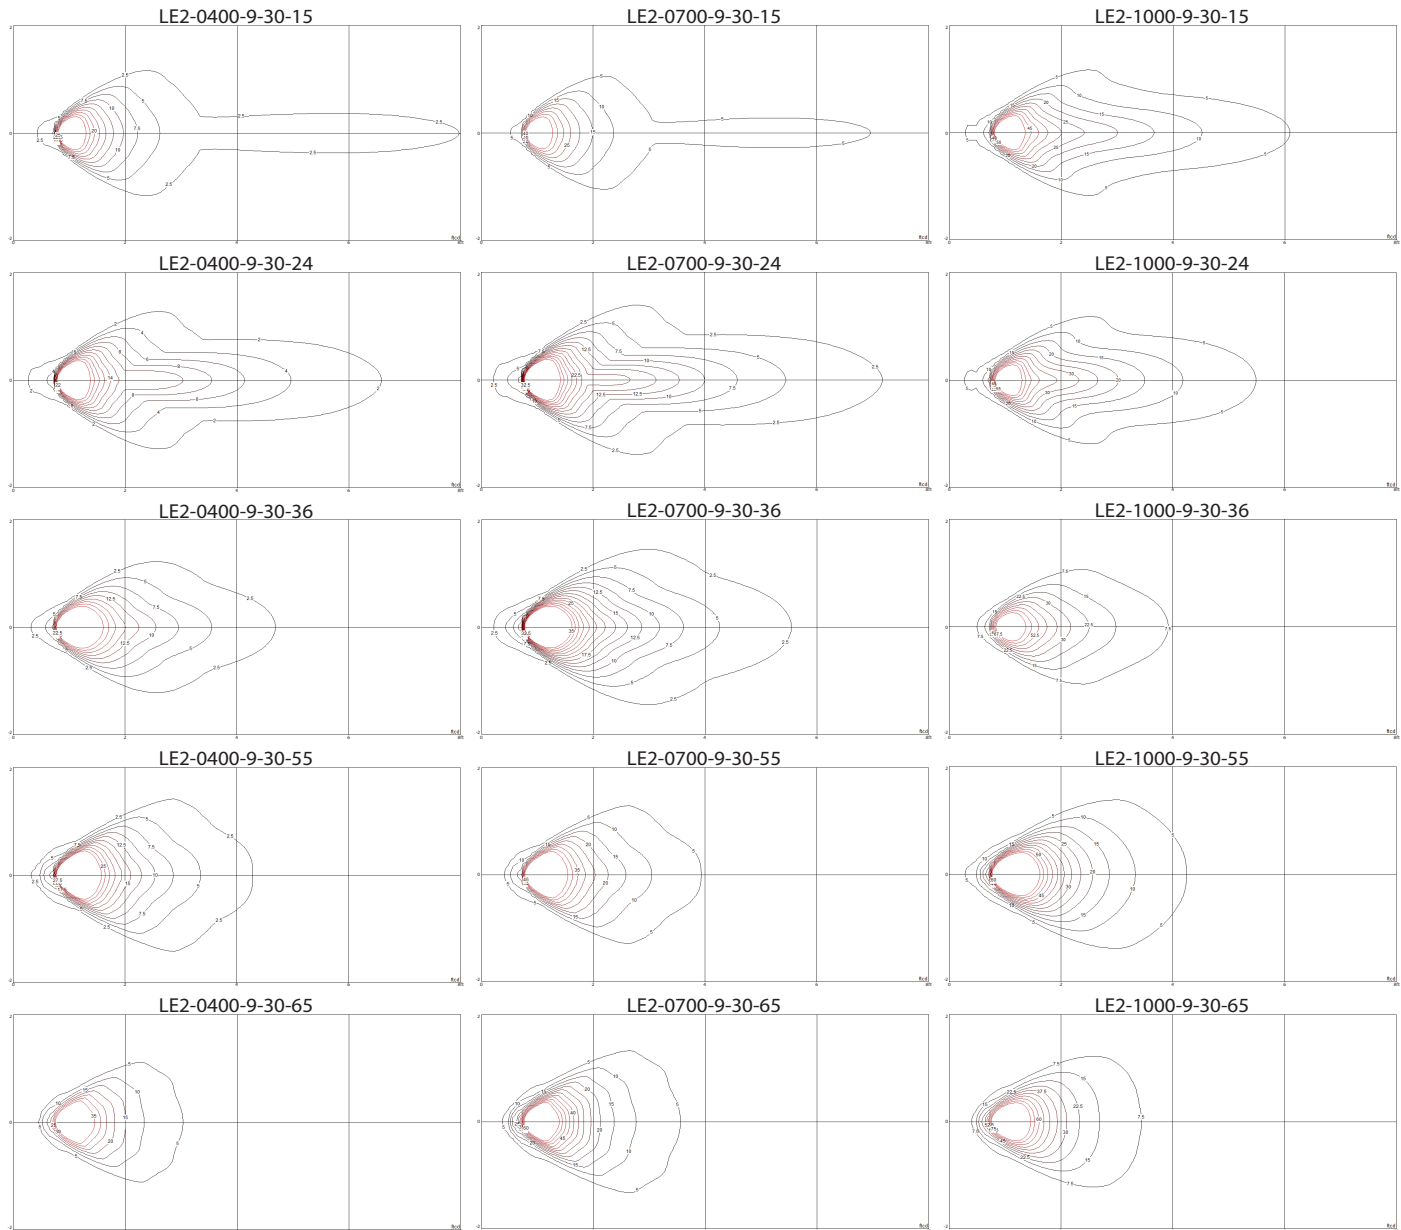

Lumen Output 90CRI 3000K			
Optic	LE2-400	LE2-700	LE2-1000
15°	222	347	458
24°	221	345	445
36°	203	317	432
55°	229	357	485
65°	234	366	496
0	N/A		


Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.		
CRI	Color Temperature	Scaling Factor
>80	2700	1.10
	3000	1.14
	3500	1.18
	4000	1.20
>90	2700	0.95
	3000	1.00
	3500	1.03
	4000	1.06

Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

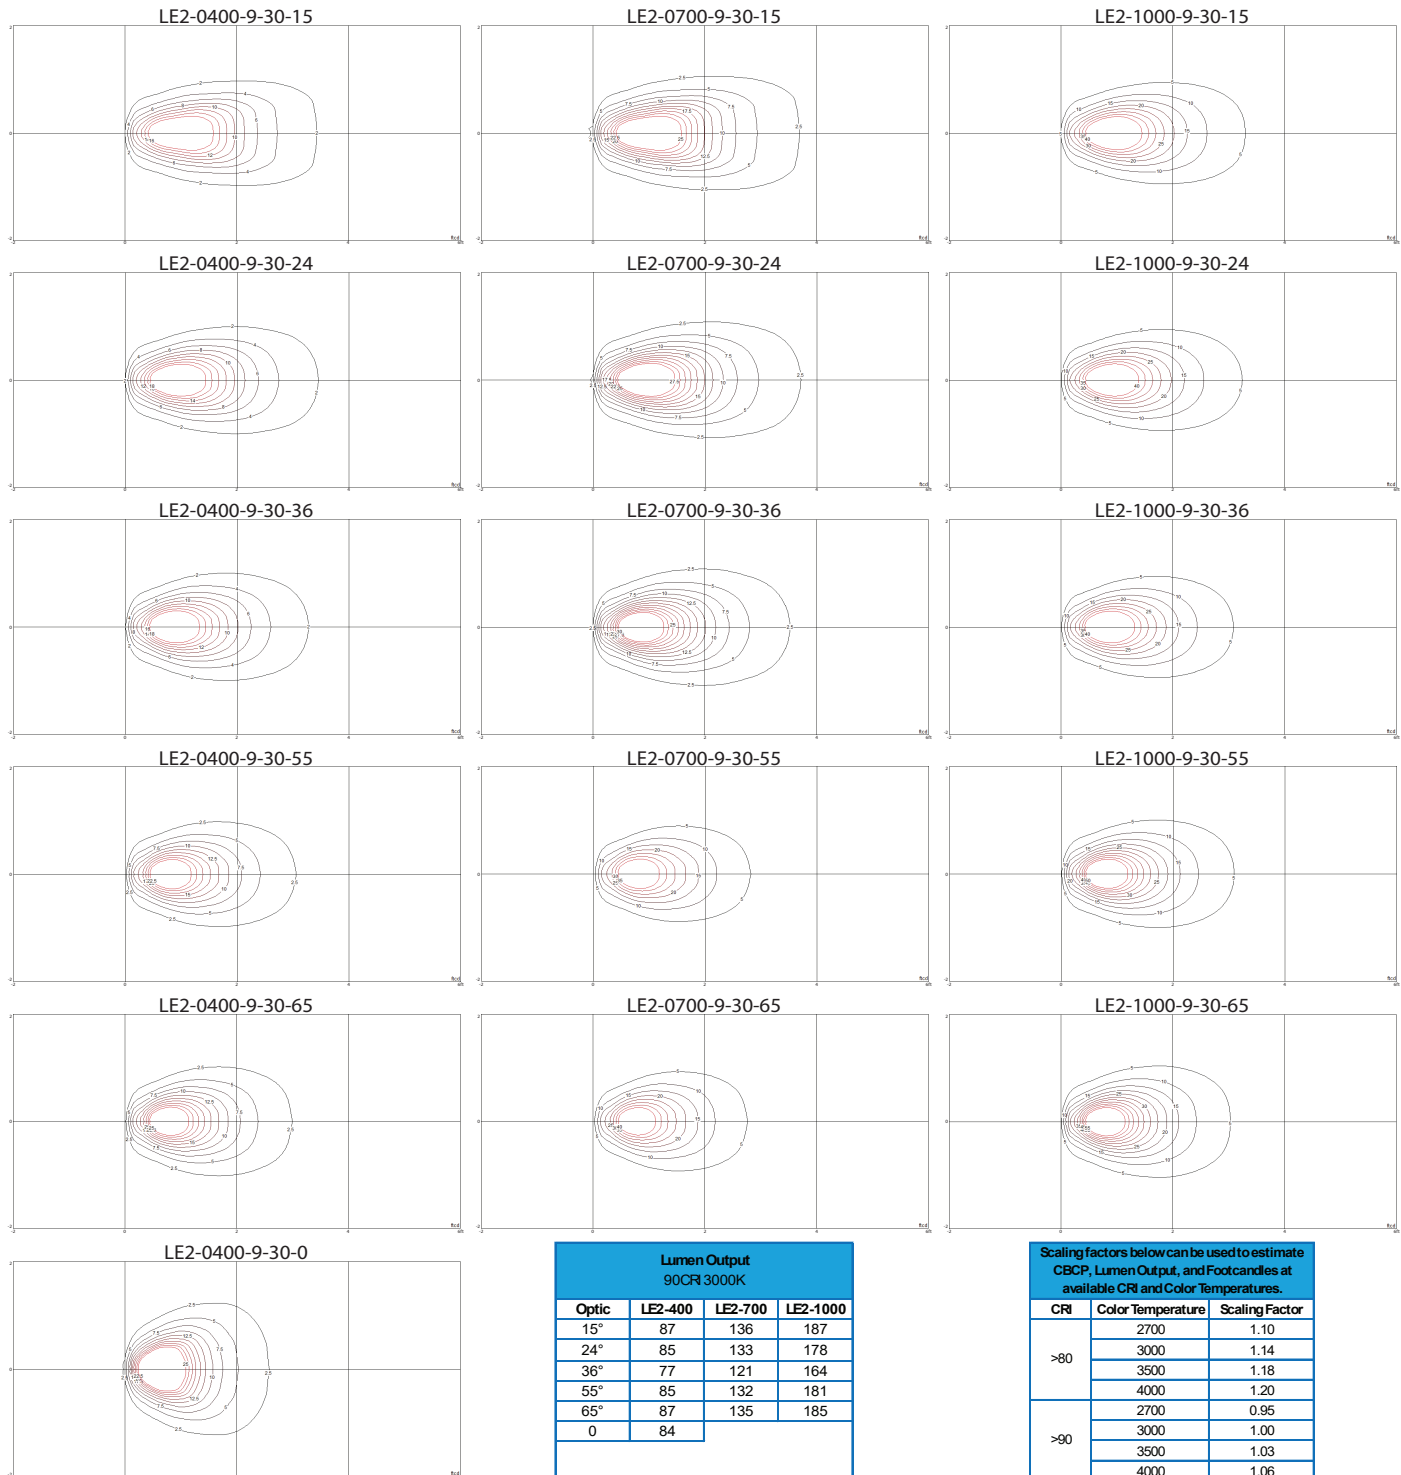


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

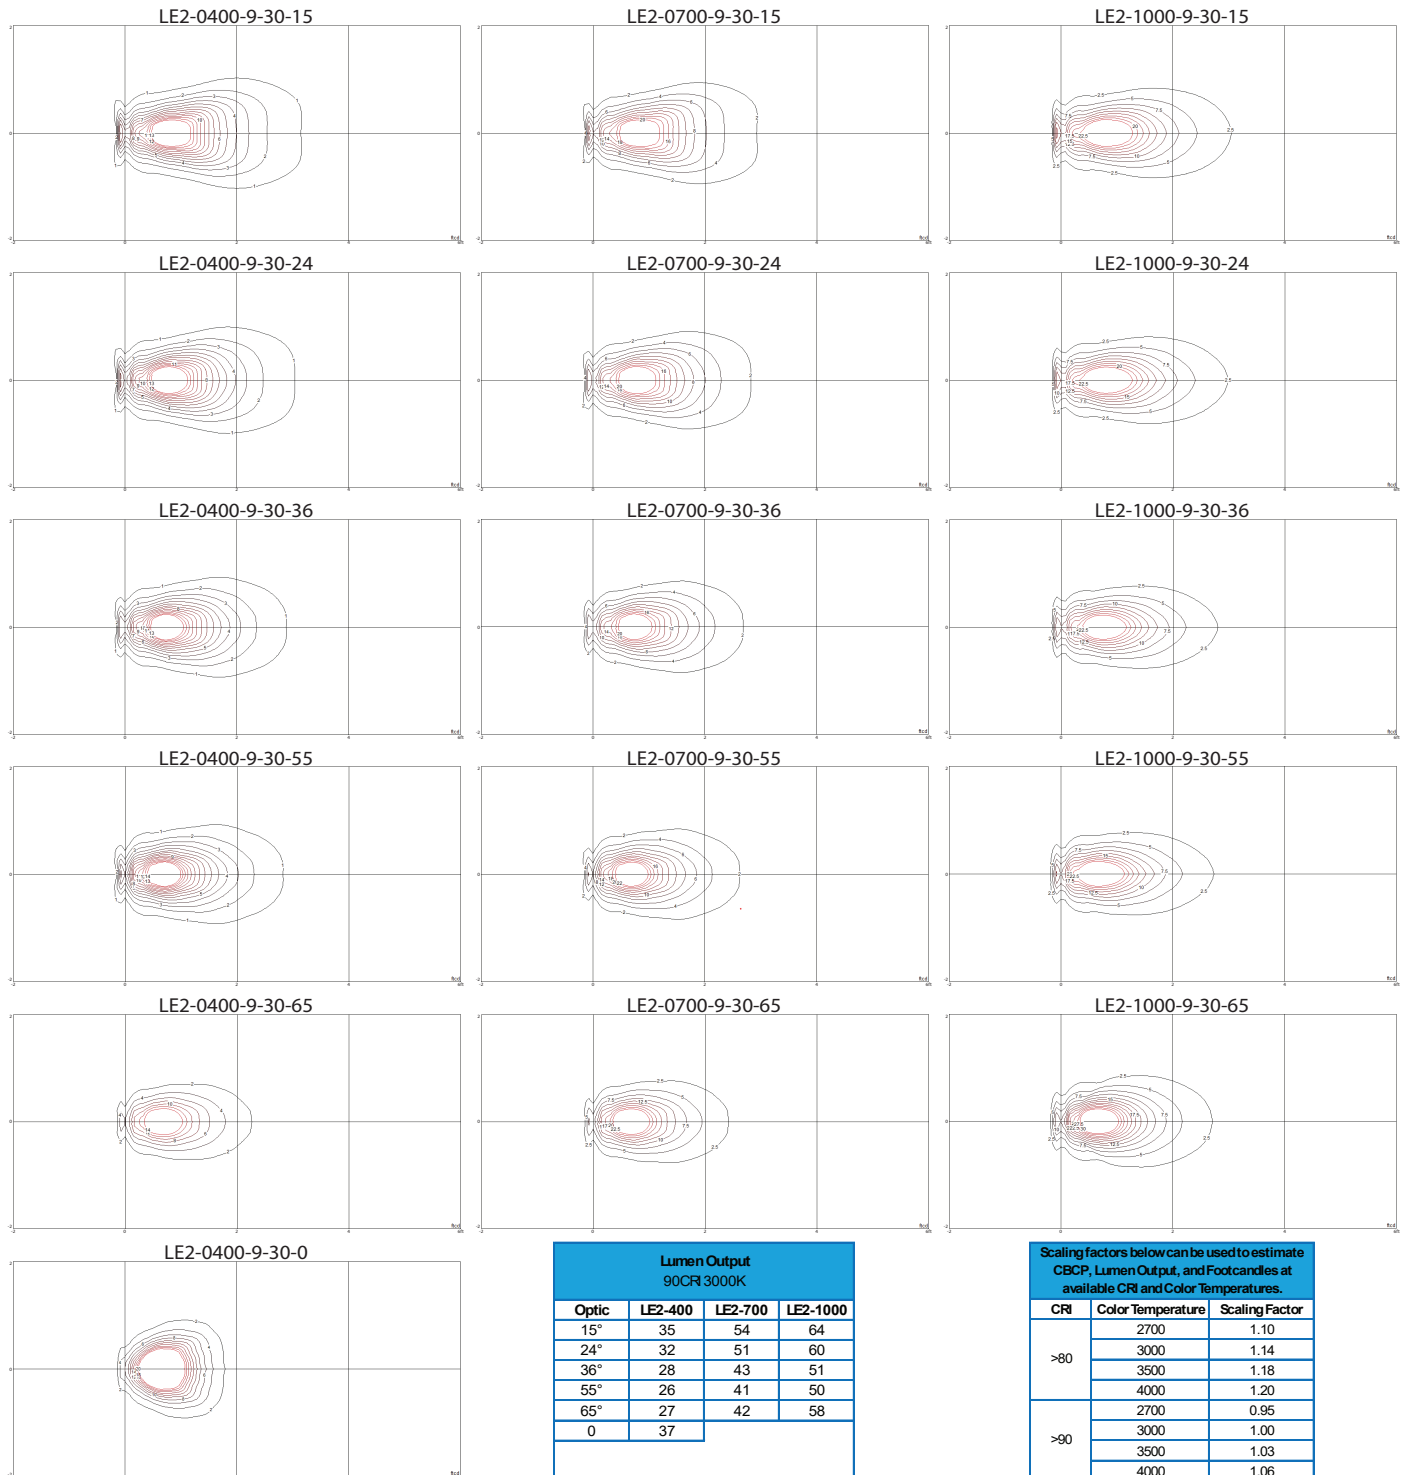


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

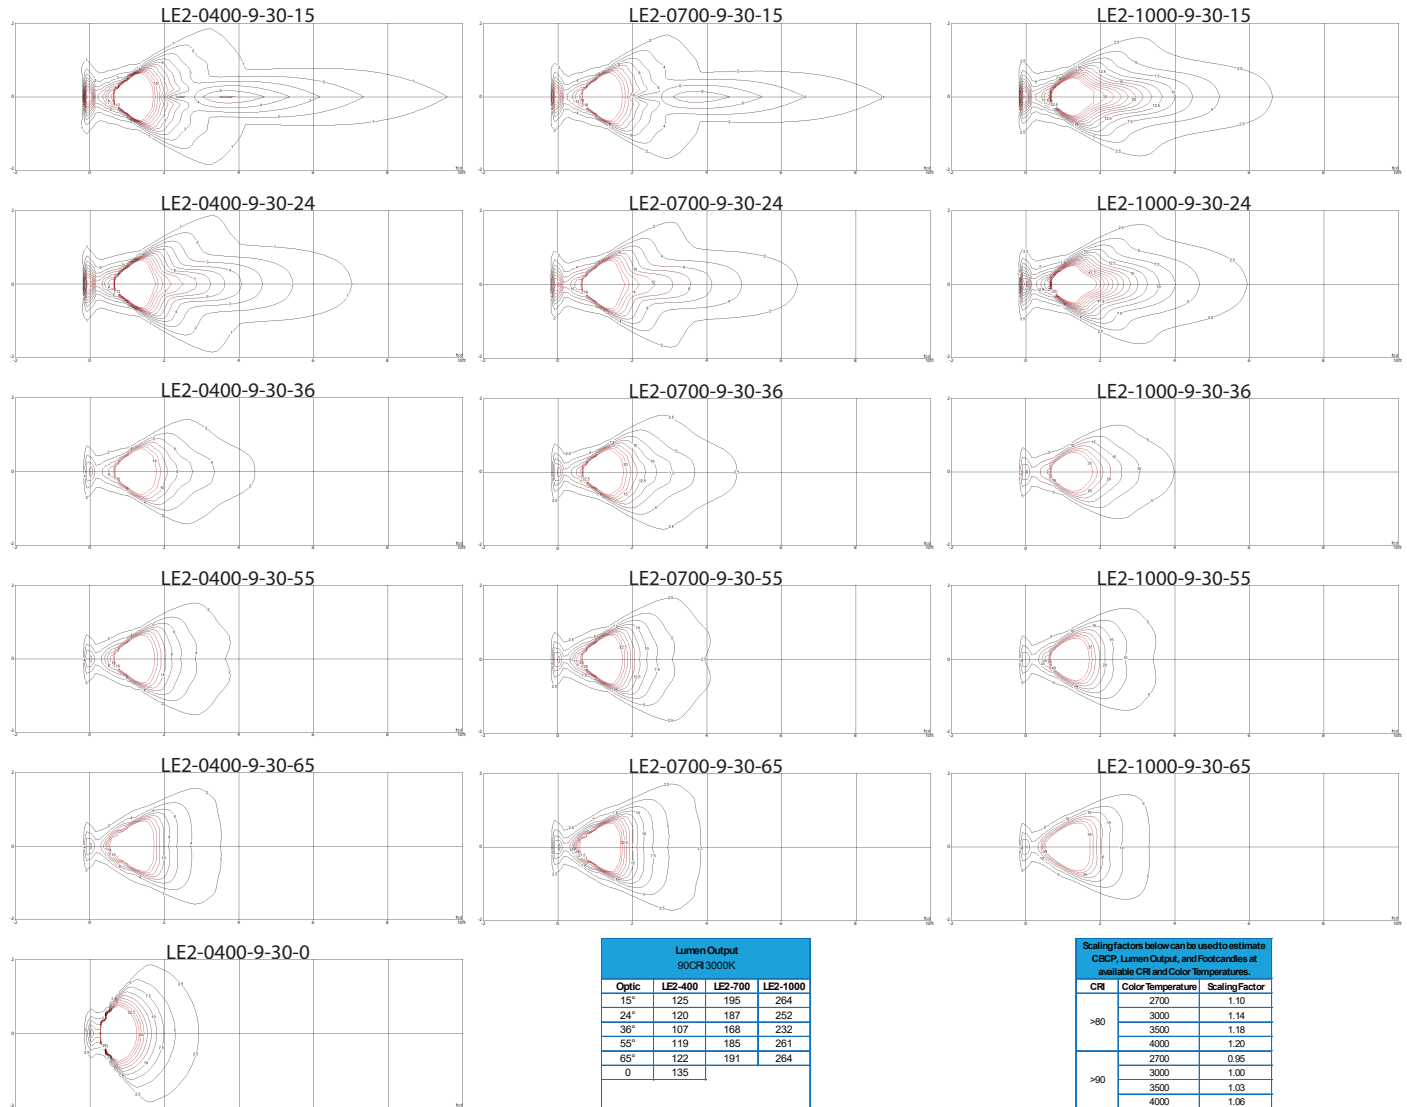


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview


Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

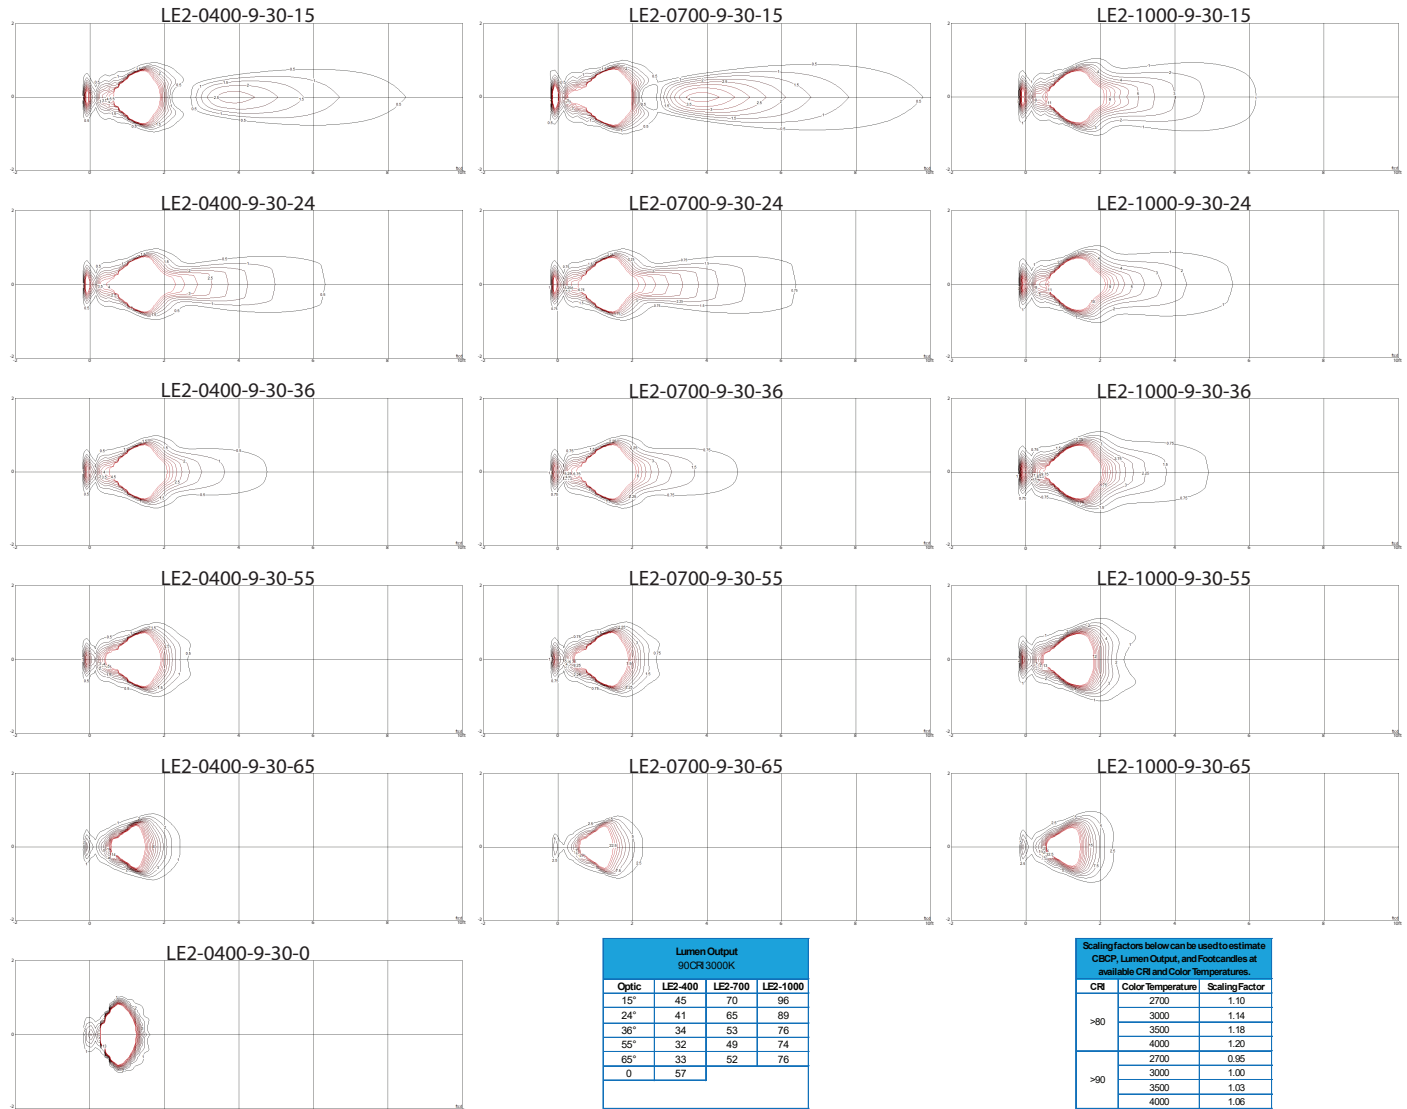

Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.
Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

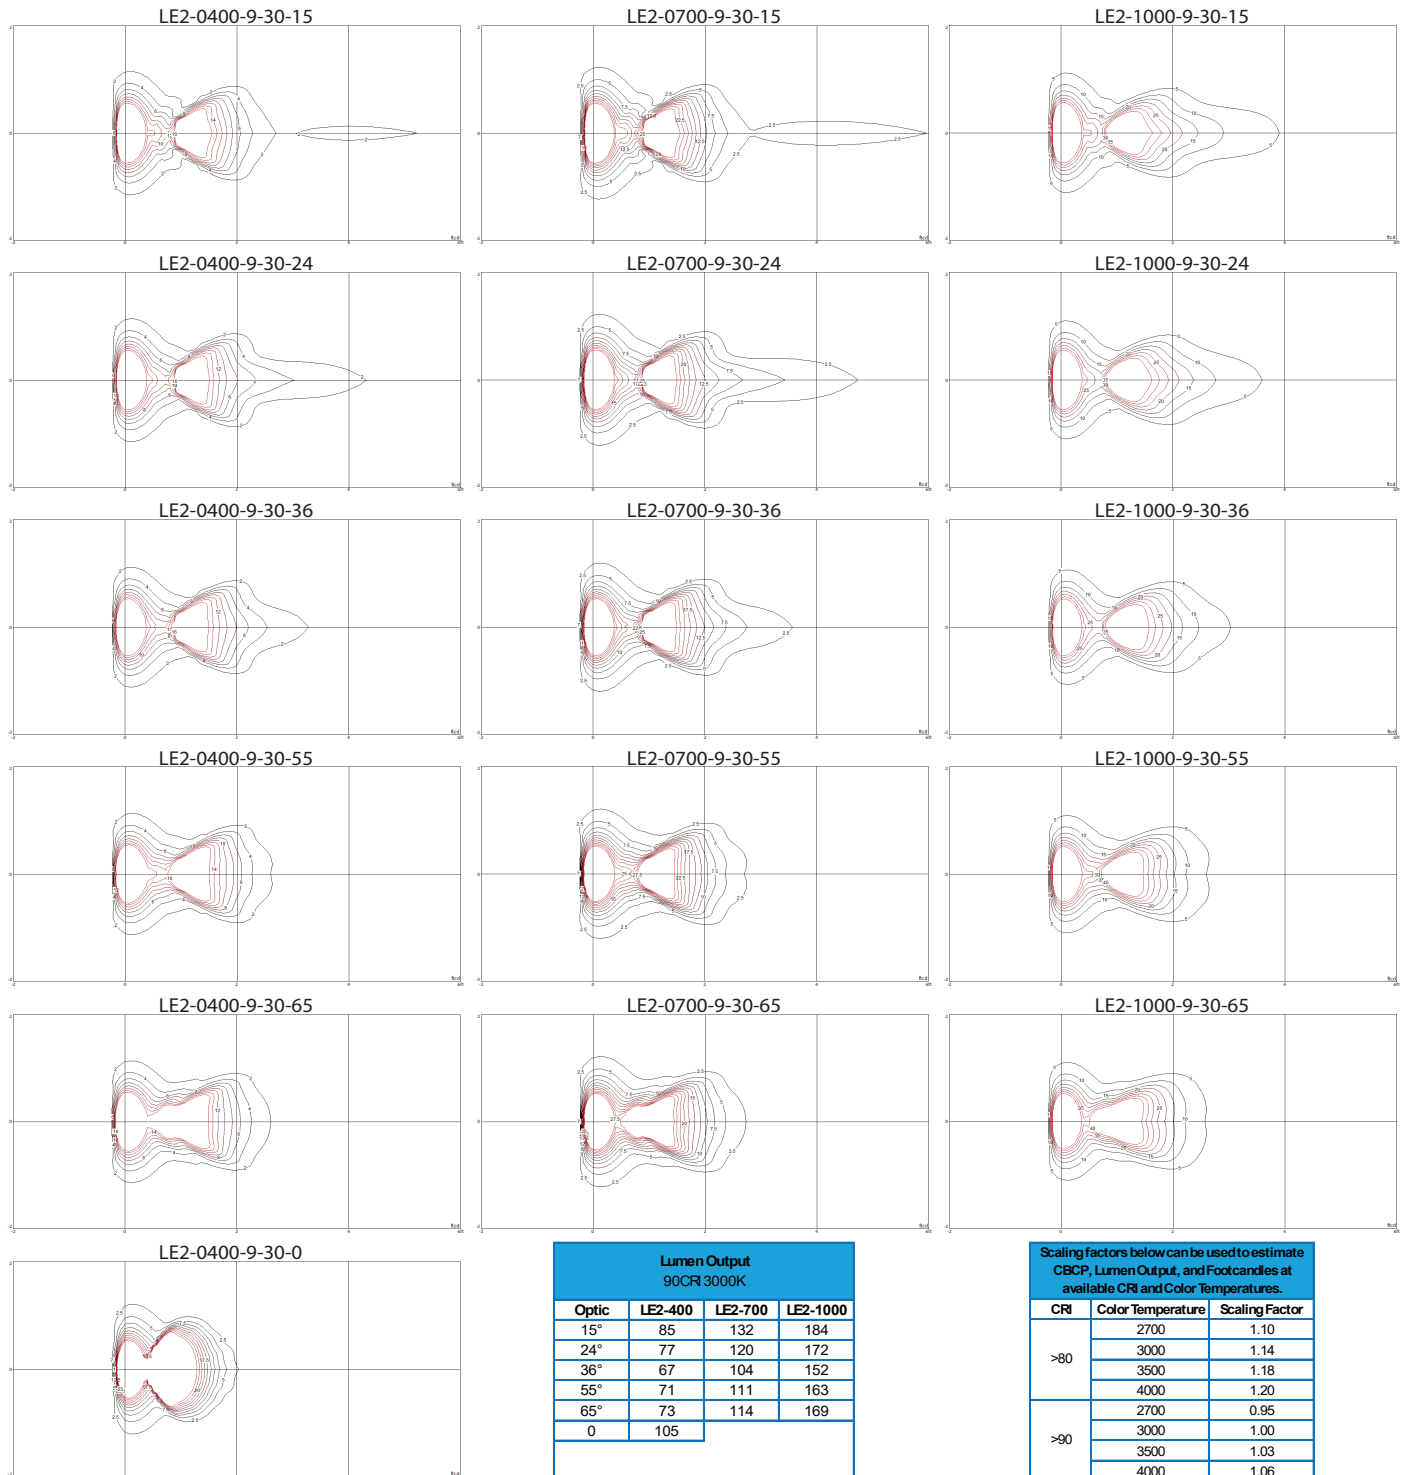


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

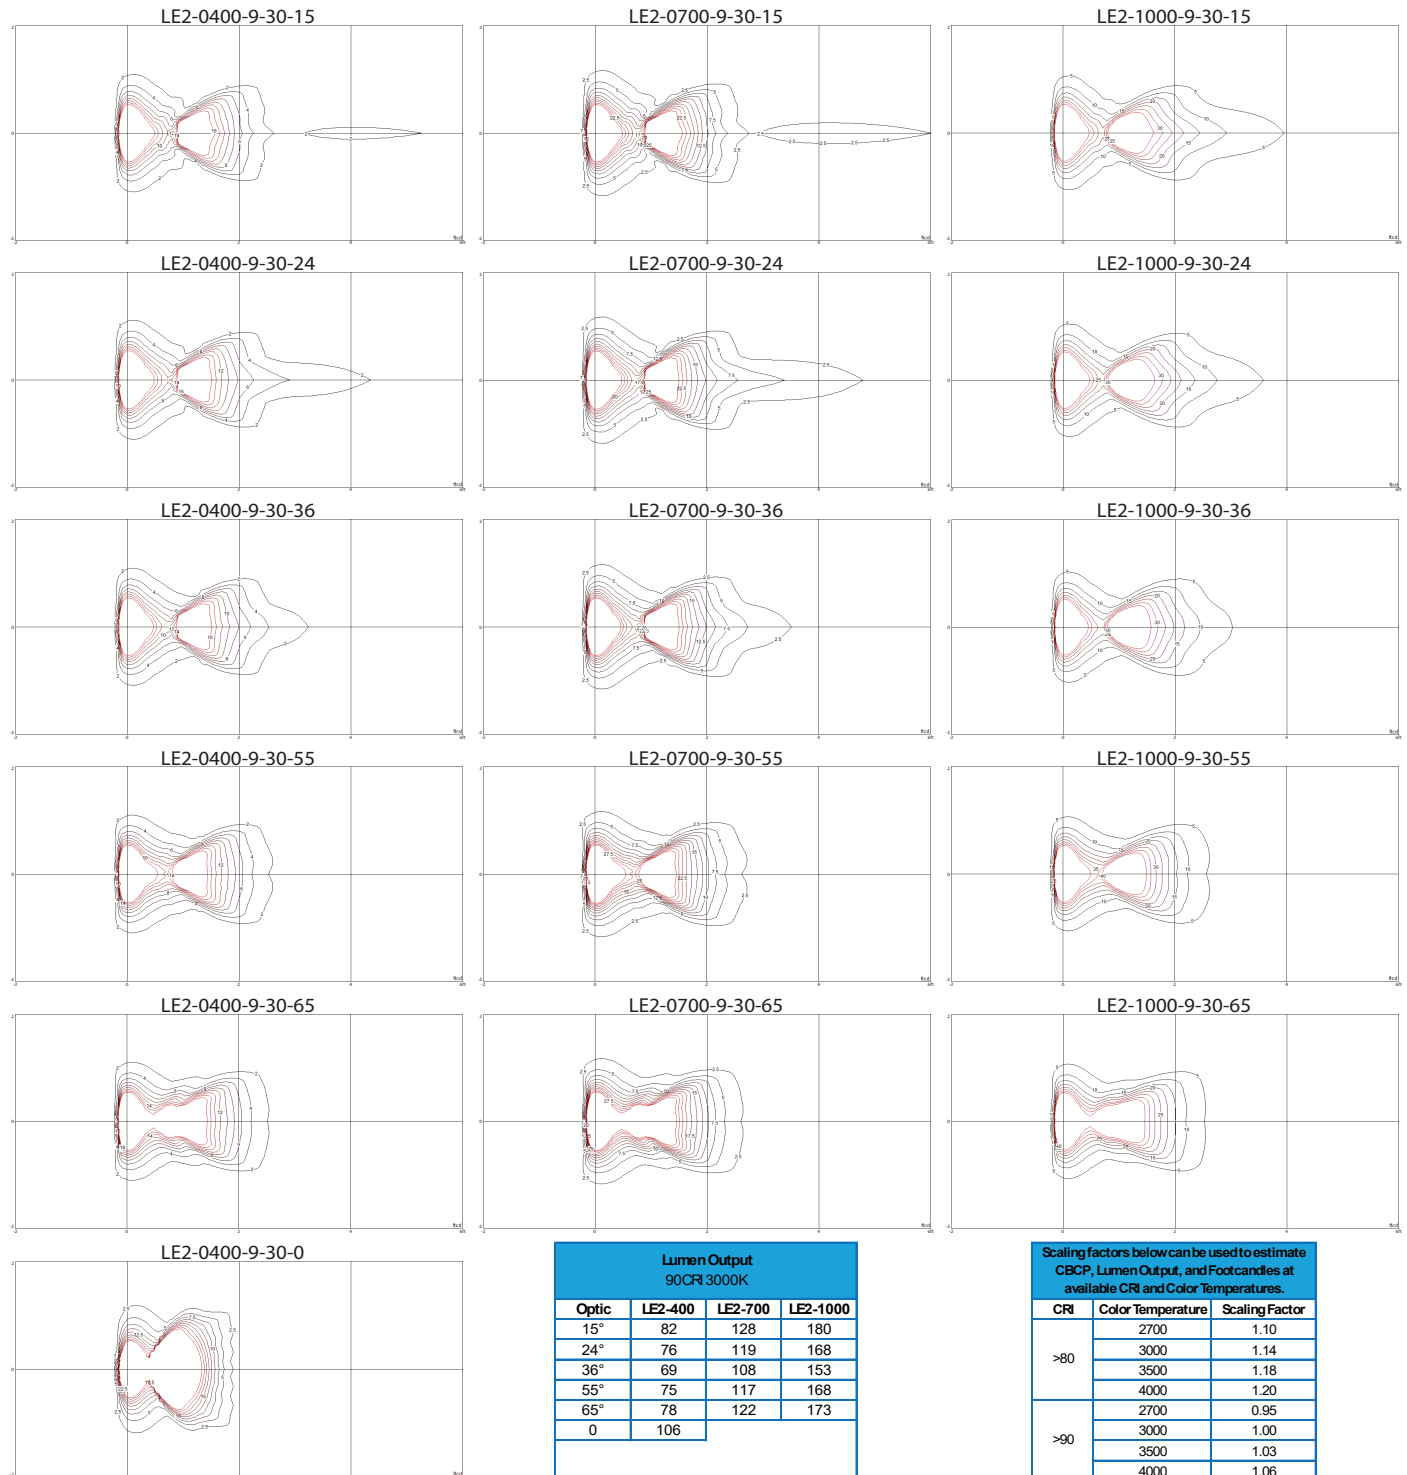


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

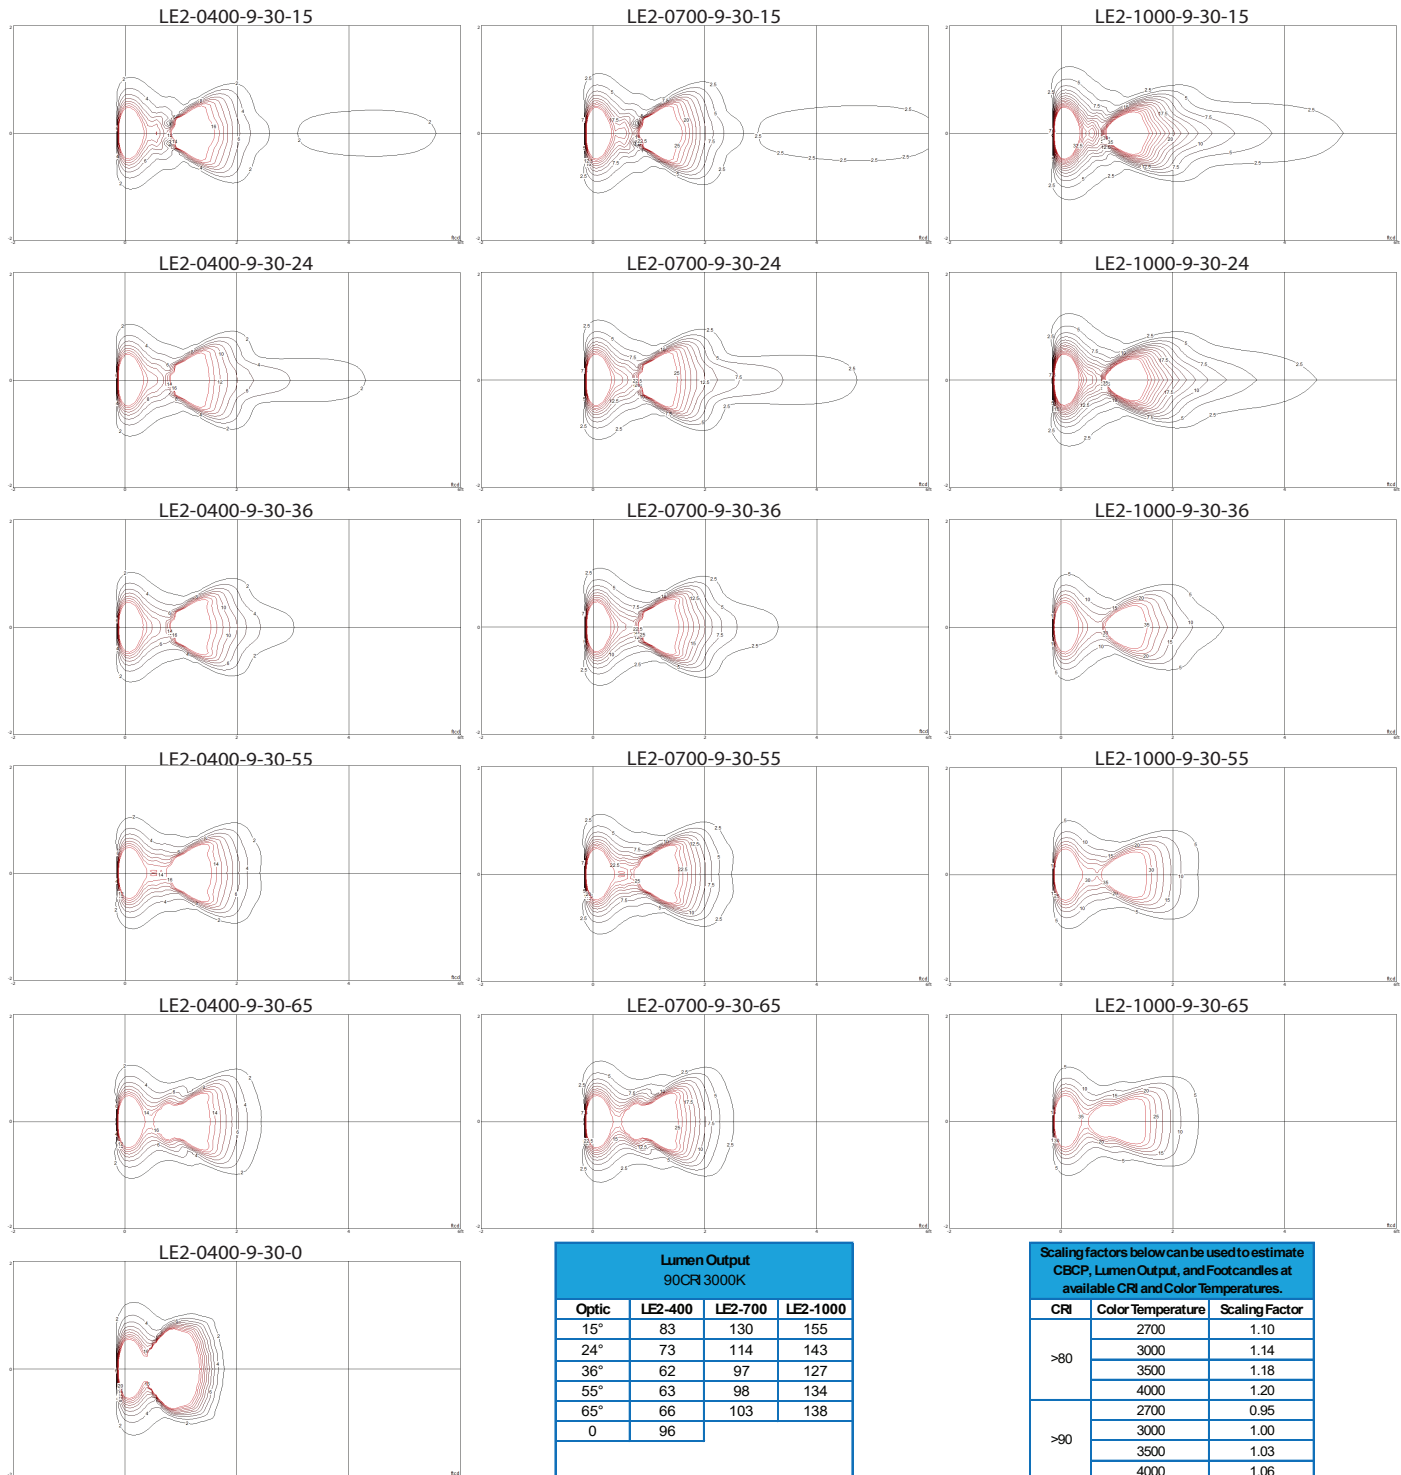


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

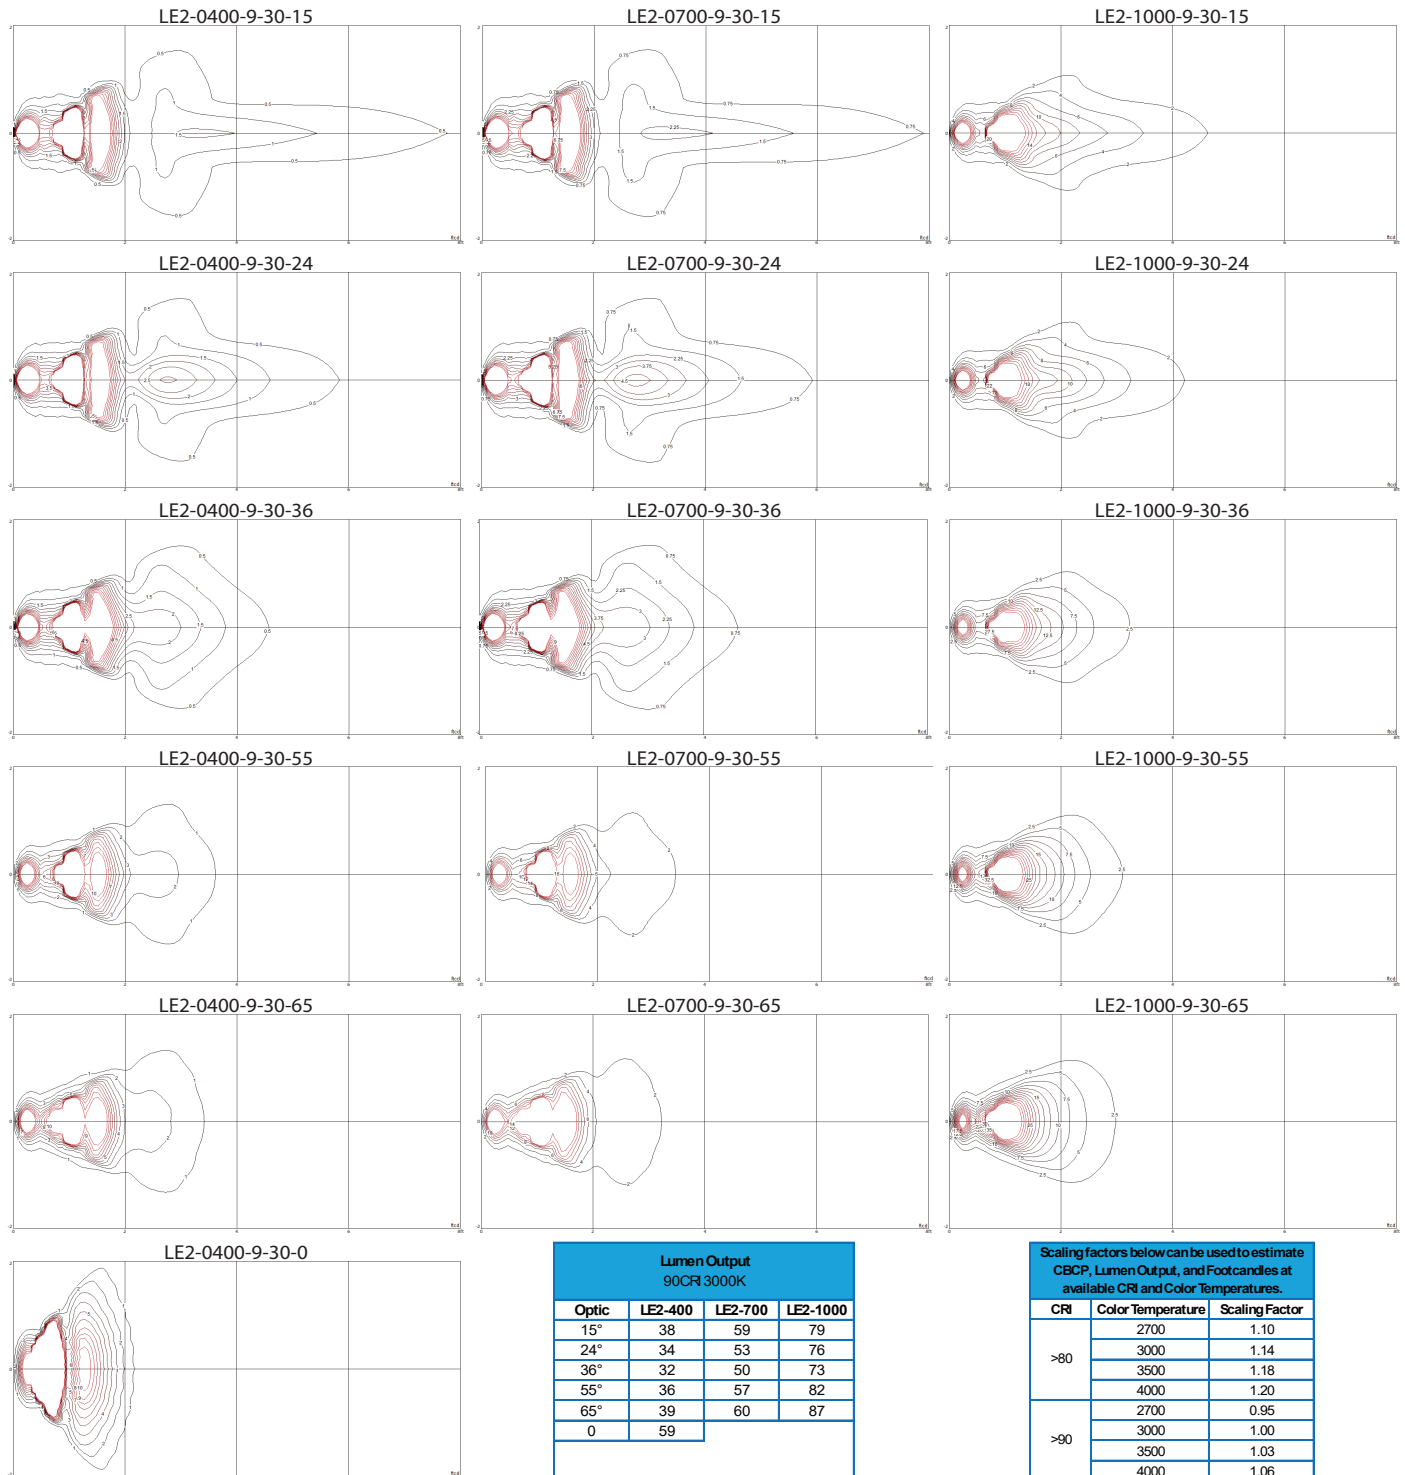


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

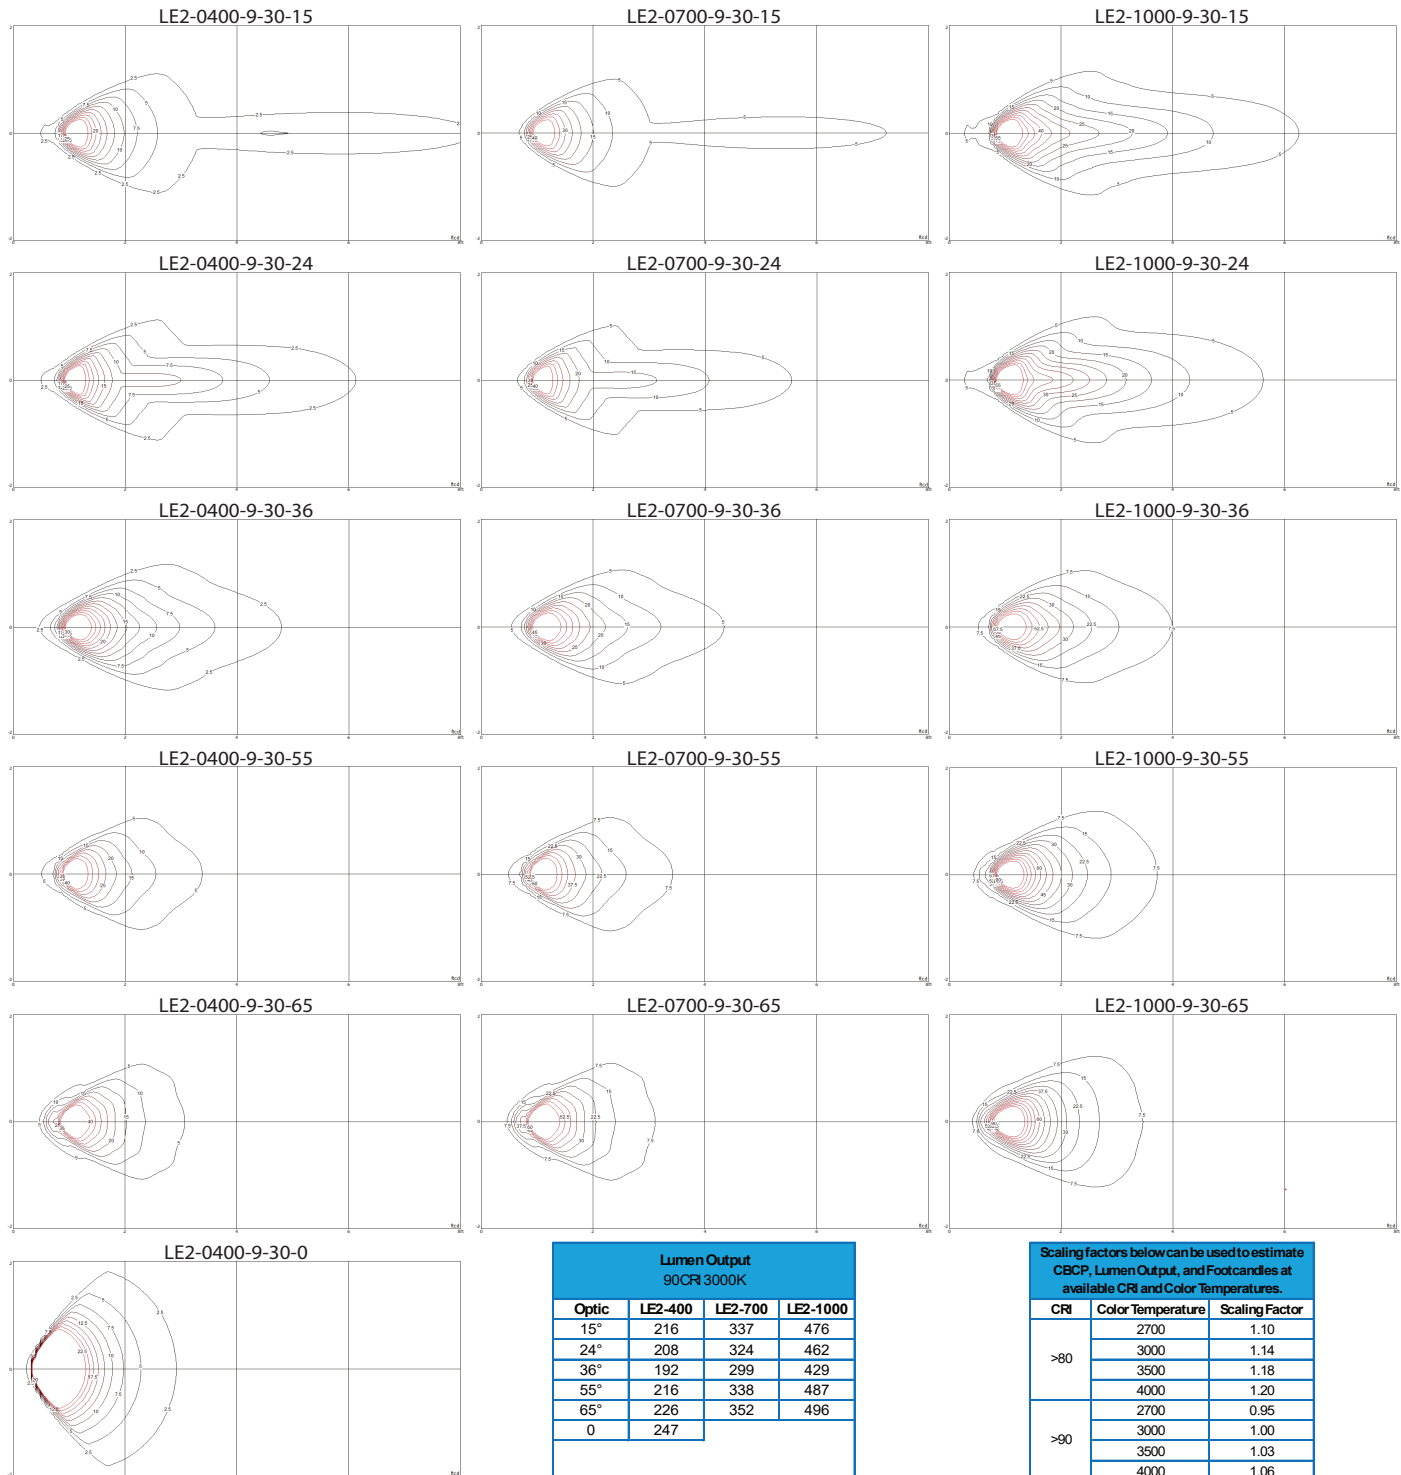


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

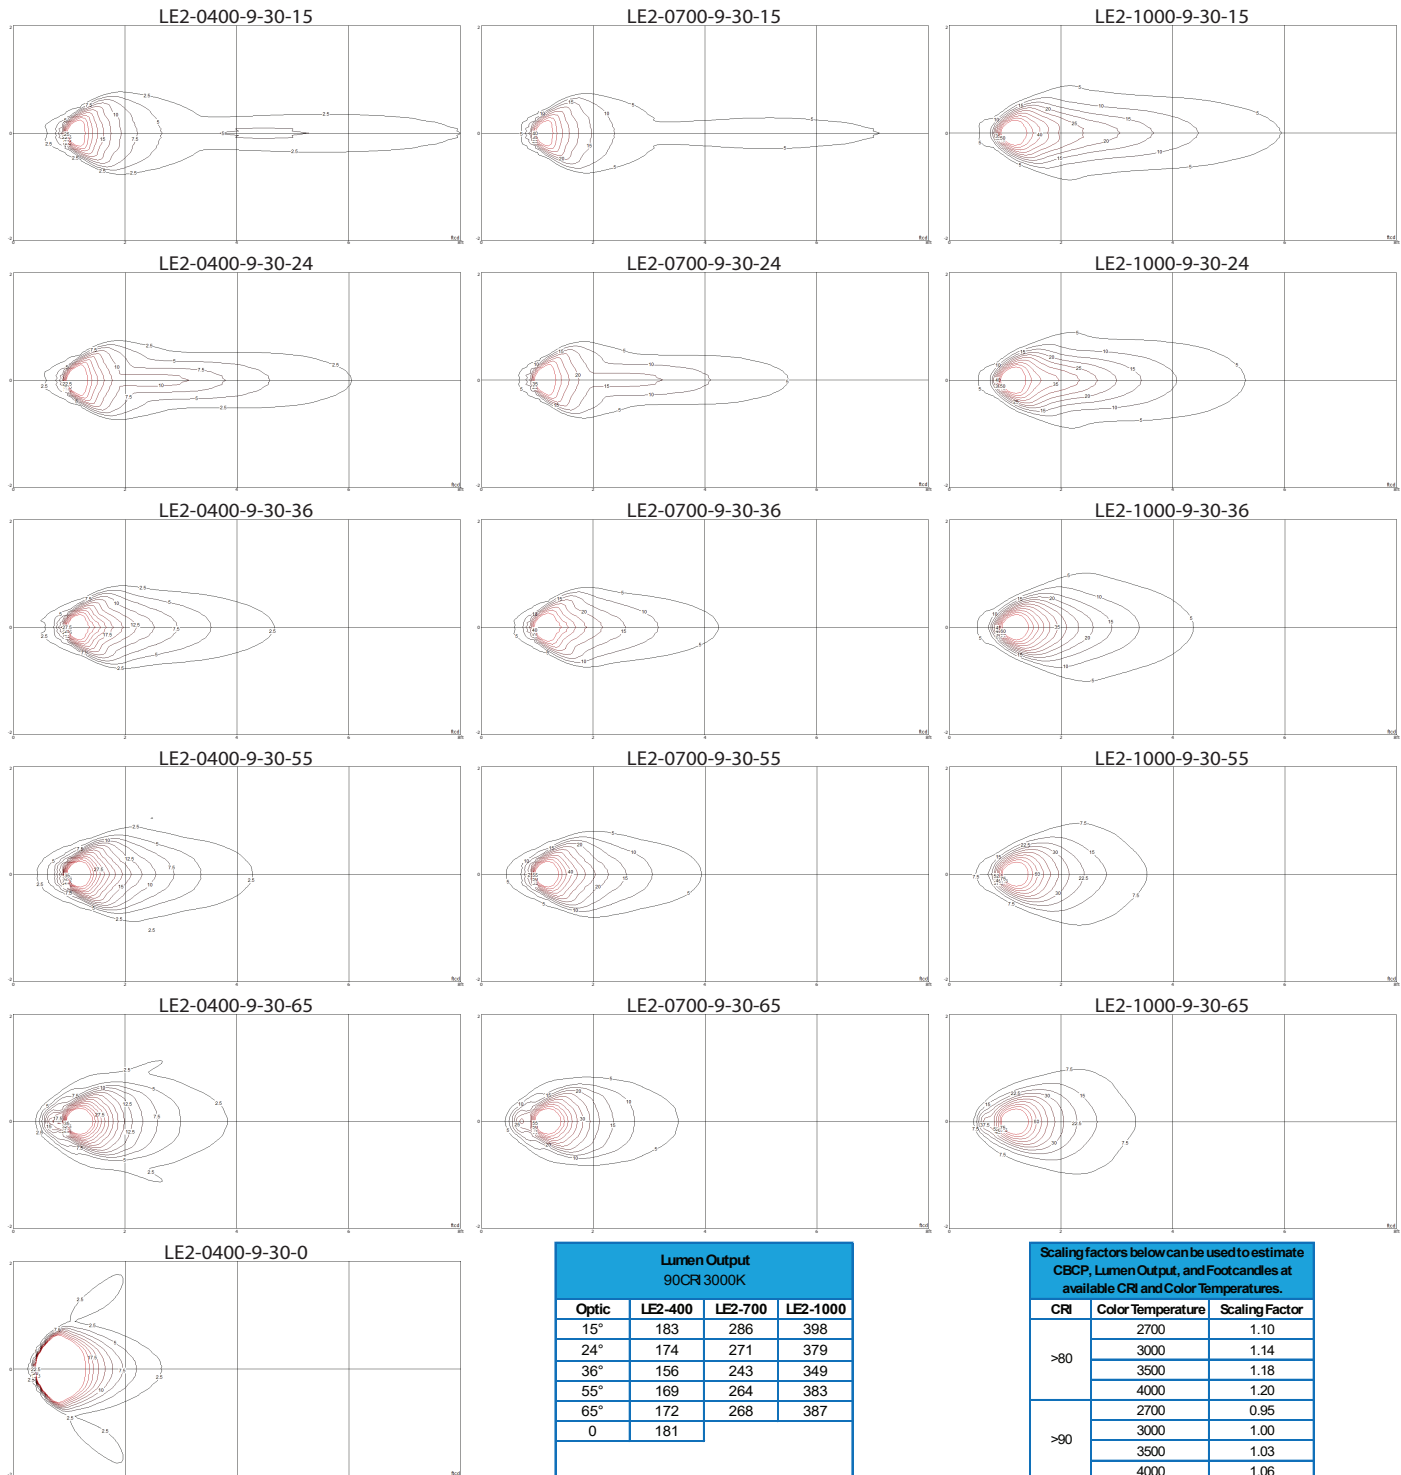


Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information for LE2 90 CRI 3000K Light Engine. Graph represents footcandles on the ground when installed at a height of 6in. For more in depth photometric data, see website or contact Vision3 Lighting.

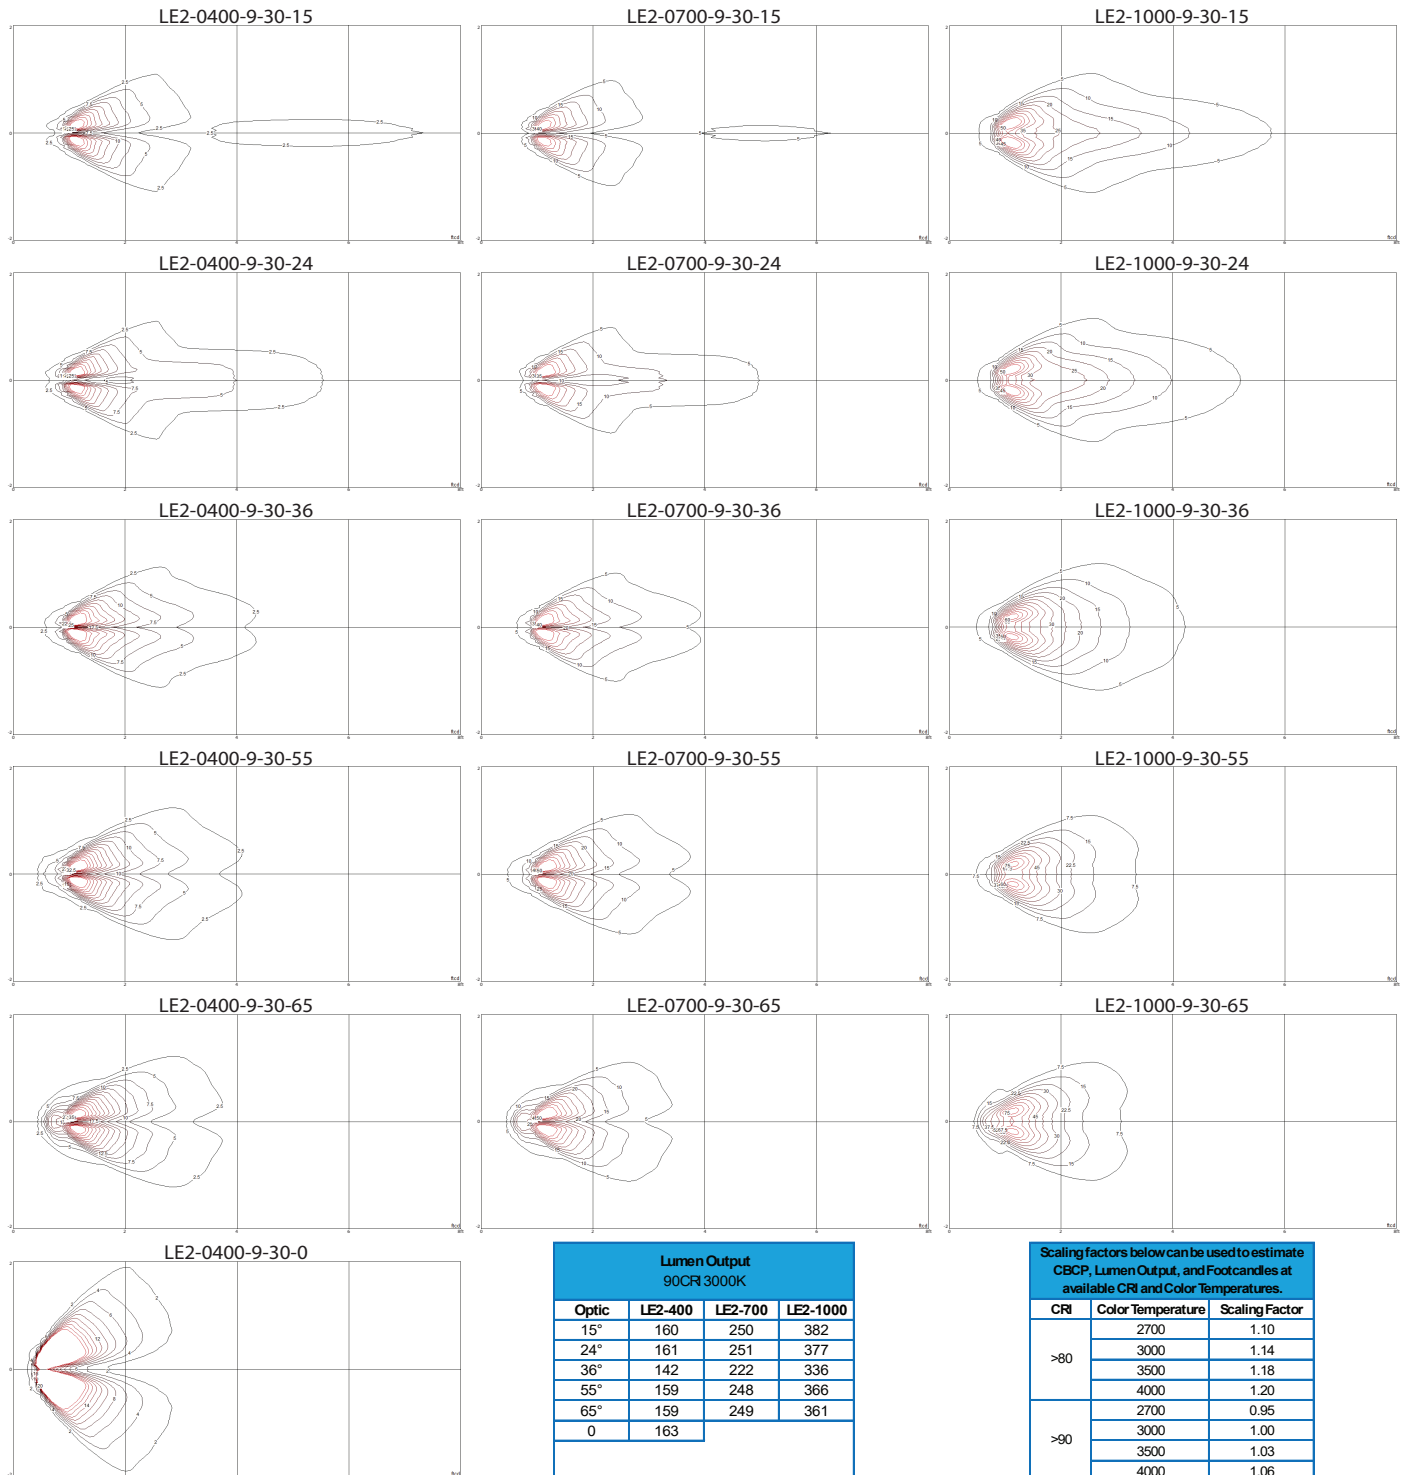

Cutoff & optic options displayed may not be available for specific fixture configurations, see fixture spec sheet for limitations.

Information subject to change without notice. See website or contact V3 for most current info.