

VISION-3 LIGHTING

LED Ring Mount **MODEL DL2** 12V, 4W LED

Specifications:

Body: Machined 6061-T6 aluminum or C36000 brass body with cast brass loop allows fixture to be hung from a chain, cable, or hook. (Hanging hardware not included). A molded high temperature silicone wire pass-thru prevents water from entering thru rear of body or around socket leads.

Cap: Machined 6061-T6 aluminum or C36000 brass cap threads on to body, allowing tool-less removal of cap, and is sealed to the body with a high temperature silicone O-ring. Accepts up to two internal accessories, held in place by a stainless steel clip.


Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.

Lens: 1/8" thick, tempered, clear lens, secured to cap with a high temperature, curing, silicone adhesive.

Lamp: 12 Volt AC, 4W LED for 20W halogen equivalent light output. LED module features patented LEDSense® thermal management, an input voltage range of 9.6 to 14.4 VAC, an L70 of 60,000 hrs., a CRI > 80, and compatibility with magnetic and low load electronic transformers (see Transformer Compatibility List). Note: LED is not dimmable. LED module and optics are not field replaceable.

Certification: CSA tested & certified to US and Canadian safety standards for wet location use per UL1598.

All ratings subject to change without notice. See web site or contact V3 for most current info.

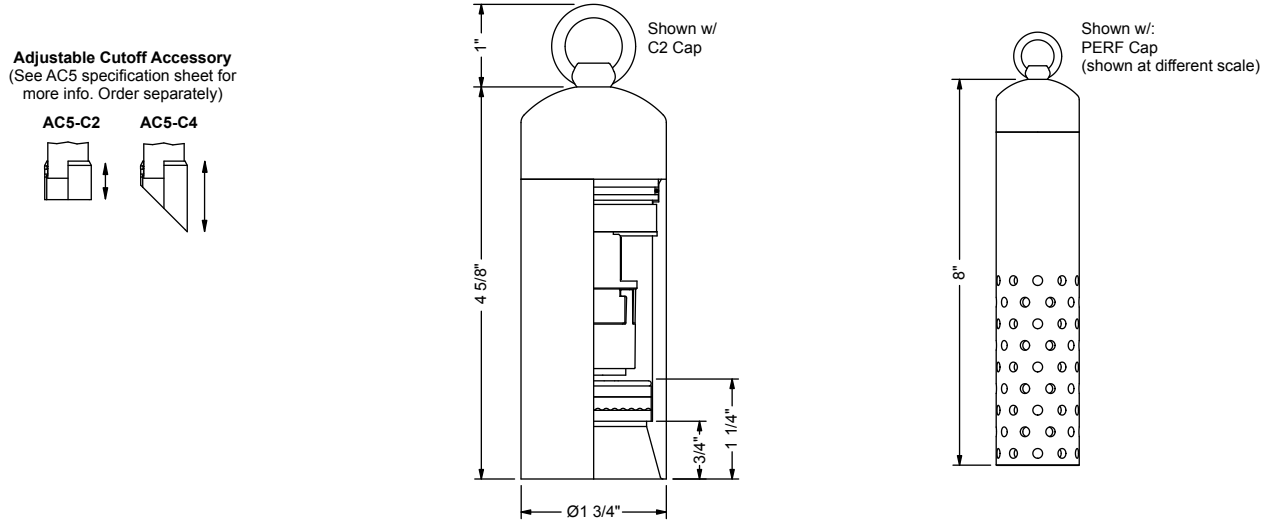

Ordering Information:

Model	Finish	Cap Style	Lamp	Lens Accy ¹	Filter ¹	Louver ¹
DL2A - Aluminum	BL - Black	C2 - Regress Lens	LED:	0 - None	0 - None	0 - None
DL2B - Brass	BLT - Textured Black	PERF - Perforated Cap	131 - 4W, 3000K, 12° 2,3,4	L1 - Spread Lens	F1 - Red	H1 - Hex Louver
	BN - Bronze		132 - 4W, 3000K, 21° 2,3,4	L2 - Linear Lens	F2 - Blue	
	BNT - Textured Bronze		133 - 4W, 3000K, 41° 2,3,4	L3 - Softening Lens	F3 - Light Blue	
	BAT - Textured Bark				F4 - Green	
	WI - White				F5 - Amber	
	GRT - Textured Green				F6 - Pink	
	SI - Silver					
	GY - Grey					
	BE - Beige					
	GNT - Textured Granite					
	SAT - Textured Sand					
	PAT - Textured Patina					
	EAT - Textured Earth					
	CLA - Clear Anodized (DL2A only)					
	NAT - Natural (DL2B only)					
	POL - Polished (DL2B only)					
	AGE - Aged (DL2B only)					

Notes:

1. Only two lens options may be specified.
2. LED also available in 2700K & 4000K color temperatures as a special order.
3. Only power LED with magnetic or V3 approved electronic transformers (contact V3 for transformer compatibility info). LED not dimmable.
4. LED module and optics are not field replaceable or interchangeable.
5. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **DL2A - BL - C2 - 132 - 0 - F2 - H1**