

# VISION·3

LIGHTING

## Multi-Tap Transformer **MODEL XM2** 120 VAC, 100/300/600/900/1200 Watt Magnetic Transformers

**Specifications:**

**100W version:**

**Construction:** 100W landscape lighting transformer with two voltage outputs: 12V and 15V. 15V tap is provided to help reduce voltage drop and increase lamp brilliance. Packaged in a stainless steel NEMA style rain tight enclosure with enclosed wiring terminals and removable cover. Unit includes side wiring access through two 1/2" and 3/4" double knockouts, and one 1 1/4" and 1 1/2" double EKO on a swing down bottom. Optional features include removable timer and field installed or remote photocell.

**Specifications:**

- 100 Watt - single circuit output.
- NEMA style rain tight keyhole mount stainless steel enclosure.
- Wiring compartment with input and output terminals.
- Complete wiring instructions.
- 24-hour removable timer option.
- Field installed or remote photocell option.
- X-10 remote control compatible.
- 6' outdoor line cord.
- Two voltage output taps, 12 and 15 Volts.
- Low voltage circuit breaker.
- UL tested & certified to US and Canadian safety standards.


**300W, 600W, 900W 1200W versions:**

**Construction:** Landscape lighting transformer with multiple voltage outputs. Multi-tap output is from 11 to 15 Volts in 300, 600, 900, and 1200 Watts. Packaged in a stainless steel NEMA 3R rain tight enclosure with enclosed wiring terminals, hinged lockable cover and up to five 1/2" and 3/4" knockouts - bottom and side entry. Optional features include removable timer and field installed or remote photocell.

**Specifications:**

- 300 Watt - single circuit output. 600 Watt - dual circuit output. 900 Watt - 3 circuit output. 1200 Watt - 4 circuit output.
- NEMA style rain tight keyhole mount stainless steel enclosure.
- Wiring compartment with input and output terminals.
- Complete wiring instructions.
- 24-hour removable timer option.
- Field installed or remote photocell option.
- X-10 remote control compatible.
- 6' outdoor line cord.
- Multiple voltage output taps, 11-15 Volts.
- Low voltage circuit breaker. 1 circuit breaker per circuit on multiple circuit models.
- UL tested & certified to US and Canadian safety standards.

**Note:** Some direct burial and 277V options are available. Contact your Vision3 Lighting sales representative for more information.

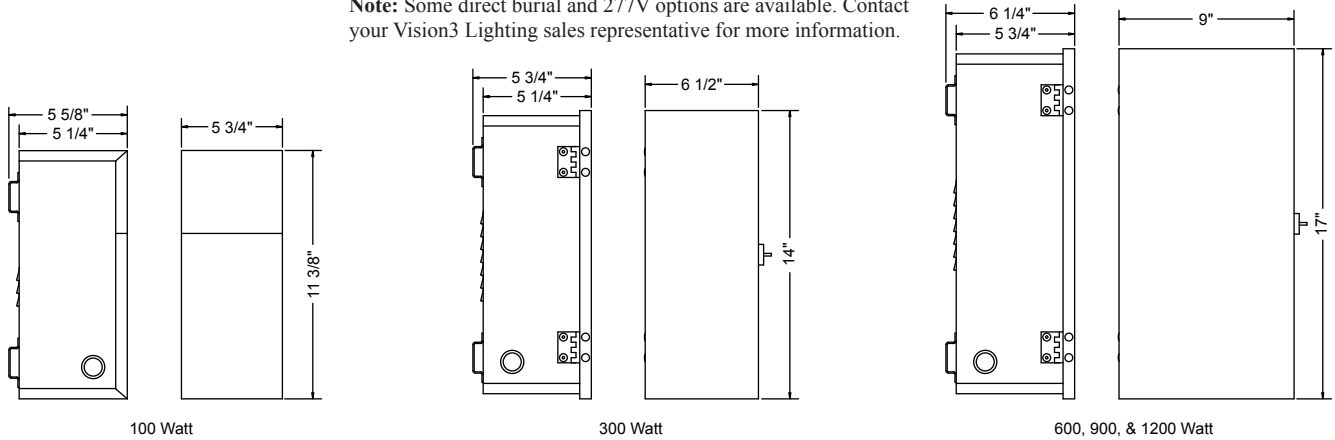

**Ordering Information:**

XM2		120	
Model	Wattage	Voltage <sup>1</sup>	Options
XM2 - Magnetic Transformer	100 - 100 Watts 300 - 300 Watts 600 - 600 Watts 900 - 900 Watts 1200 - 1200 Watts	120 - 120 Volts	T - 24-hour Removable Timer P - Built in Photocell TP - 24-hour Removable Timer and Built in Photocell

**Notes:**

1. Some direct burial and 277V options are available. Contact your Vision3 Lighting sales representative for more information.
2. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **XM2 - 600 - 120**