VISION:3

Surface Mount with Cap Option MODEL MO19

Low Voltage Mount


Specifications:

Surface Mount: Surface mounts are machined from 6061-T6 aluminum or C36000 brass. Aluminum surface mounts are black anodized for corrosion resistance. Brass surface mounts are finished to match the cap.

Caps: Caps are machined from 6061-T6 aluminum or C36000 brass. Cap contains a 1/2" NPS threaded mounting hole. Standard cap is locked to surface mount with three 18-8 stainless steel set screws. Single Set Screw cap is locked to surface mount with one 18-8 stainless steel set screw, which uses the same tool as used on the Vision3 Knuckle for one tool adjustment.


Mounting: Four mount holes (two slotted and two standard, all 1 3/8" on center) are available for mounting to any surface. The TM style option includes two 3" stainless steel hanger bolts with stainless steel nuts for tree mounting. The hanger bolt driver should be used for hanger bolt installation, and can be purchased separately from Vision3 using part # V101106.


Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.




'SM' Option with 'STD' Cap Option











Surface Mount Detail

'TM' Option with 'STD' Cap Option




Hanger Bolt Driver Used to install 'TM' option mount bolts. Purchase separately using Vision3 part # V101106.



Shown with 'TM' style and 'STD' cap options.

Ordering Information:

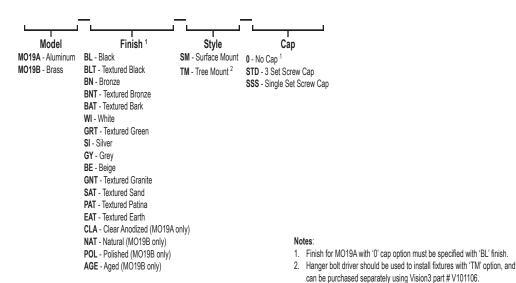

Example: MO19A - BN - SM - SSS

Specifications, certifications, and ordering information are subject to