

VISION-3 LIGHTING

Path Light **MODEL PA1** 12/120V, 4W LED

Specifications:

Construction: Aluminum, brass, or stainless steel with 18-8 stainless steel hardware. Also available with copper shade (all other components brass).

Stem: Stems machined from 6061-T6 aluminum, C36000 brass, or 304 stainless steel and are available in lengths of 6", 12", 18", 24", 30", 36", 42" and 48".

Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged. Stainless steel model

available in three additional metal finishes: Natural, Polished, and Brushed. Copper model available in Natural finish only.

Lens: 1/8" wall tempered borosilicate tube, secured to cap with a high temperature, UV curing silicone adhesive. Available with clear or frosted finish.


Lamp: 12 Volt AC, 4W LED module with integral driver. LED module features patented LEDSense® thermal management, an input voltage range of 9.6 to 14.4 VAC, an L70 of 60,000 hrs., a CRI > 80, and compatibility with magnetic and low load electronic transformers (see Transformer Compatibility List).

Note: LED is not dimmable. LED module is not field replaceable.

Electrical: Supplied standard with 24" of 16-2 cable beyond stem for connection to a remote low voltage power supply. Also available with integral 120V, 60VA low load electronic transformer in certain mount options.

Certification: CSA tested & certified to US and Canadian safety standards for wet location landscape use per UL1838 and UL1598.

All ratings subject to change without notice. See web site or contact V3 for most current info.

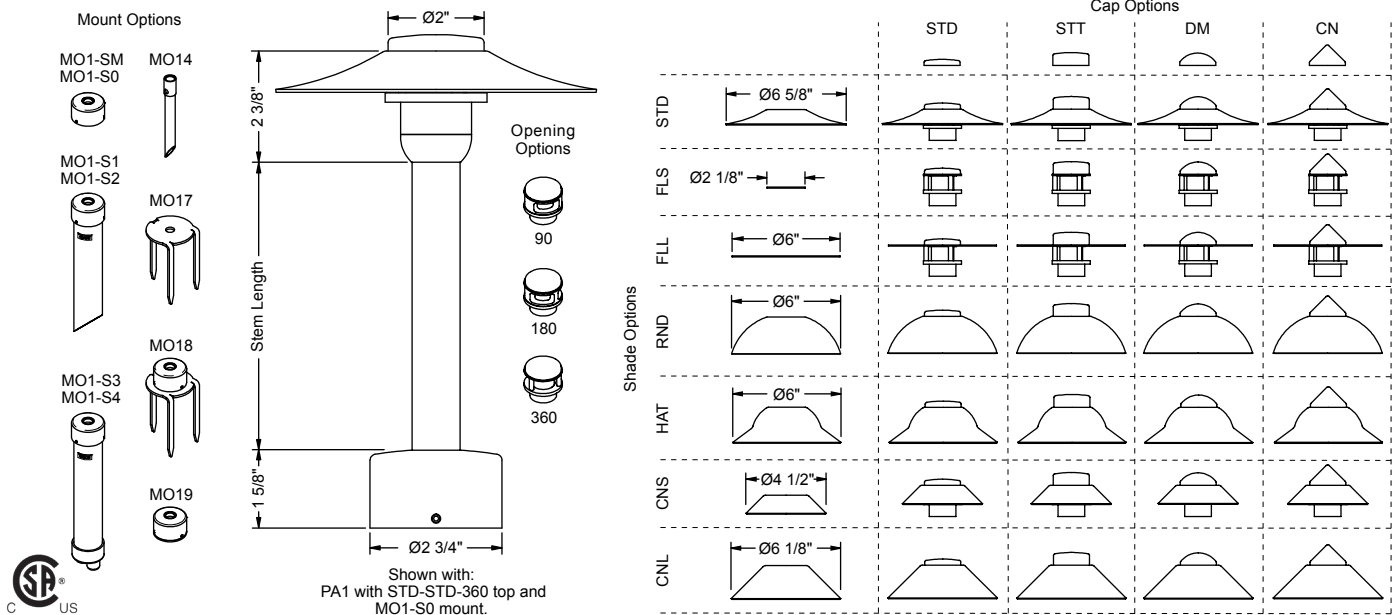

Ordering Information:

| Model | Finish | Cap | Shade | Opening | Lens | Mount ² | Input Voltage | Stem | Lamp |
|-------------------------------|---|-----------------------|--------------------|------------|--------------|---|-----------------------------|---------------|-----------------------------------|
| PA1A - Aluminum | BL - Black | STD - Standard | STD - Standard | 360 - 360° | CL - Clear | SN - Nipple Only (No Mount & No Cap) ⁴ | 12 - 12 Volt | 6 - 6" Stem | LED: 131 - 4W, 3000K ⁶ |
| PA1B - Brass | BLT - Textured Black | STT - Standard (Tall) | FLS - Flat (Small) | 180 - 180° | FR - Frosted | MO1-S0 - No Mount (MO1 Cap Only. 36" max. stem) | 120 - 120 Volt ³ | 12 - 12" Stem | |
| PA1C - Copper ⁵ | BN - Bronze | DM - Dome | FLL - Flat (Large) | 90 - 90° | | MO1-SM - MO1 Surface Mount (36" max. stem) | | 18 - 18" Stem | |
| PA1S - Stainless ¹ | BNT - Textured Bronze | CN - Cone | RND - Round | | | MO1-S1-12 - 12" MO1 Stake Mount (36" max. stem) | | 24 - 24" Stem | |
| | BAT - Textured Bark | | HAT - HAT | | | MO1-S1-12 - 12" MO1 Stake Mount (36" max. stem) | | 30 - 30" Stem | |
| | WI - White | | CNS - Cone (Small) | | | MO1-S1-18 - 18" MO1 Stake Mount (36" max. stem) | | 36 - 36" Stem | |
| | GRT - Textured Green | | CNL - Cone (Large) | | | MO1-S2-12 - 12" MO1 Adjustable Stake Mount (12" stem only) | | 42 - 42" Stem | |
| | SI - Silver | | | | | MO1-S2-12 - 12" MO1 Adjustable Stake Mount (18" stem only) | | 48 - 48" Stem | |
| | GY - Grey | | | | | MO1-S2-24 - 24" MO1 Adjustable Stake Mount (24" to 48" stems only) | | | |
| | BE - Beige | | | | | MO1-S3-12 - 12" MO1 Junction with Transformer (36" max. stem) | | | |
| | GNT - Textured Granite | | | | | MO1-S3-12 - 12" MO1 Junction with Transformer (36" max. stem) | | | |
| | SAT - Textured Sand | | | | | MO1-S3-18 - 18" MO1 Junction Mount (36" max. stem) | | | |
| | PAT - Textured Patina | | | | | MO1-S4-12 - 12" MO1 Junction Mount (36" max. stem) | | | |
| | EAT - Textured Earth | | | | | MO1-S4-18 - 18" MO1 Junction Mount (36" max. stem) | | | |
| | CLA - Clear Anodized (PA1A only) | | | | | MO14 - MO14 Brass Stake Mount (24" max. stem) | | | |
| | NAT - Natural (PA1B, PA1C, & PA1S only) | | | | | MO17 - MO17 Spike Mount (24" max. stem) | | | |
| | POL - Polished (PA1B & PA1S only) | | | | | MO18 - MO18 Spike Mount w/ Cap (24" max. stem) | | | |
| | AGE - Aged (PA1B only) | | | | | MO19 - MO19 Surface Mount w/ Cap (Not available with PA1S. 36" max. stem) | | | |
| | BRU - Brushed (PA1S only) | | | | | | | | |

Notes:

- PA1S model only available with STD cap, STD shade, and 360 opening options.
- See mount spec. sheets for mount details.
- 120 Volt option only available with the MO1-S3 mount options.
- SN mount option requires that a separate mount be used.
- PA1C only available in NAT finish. Only shade is copper, all other components brass.
- LED available in 2700K & 4000K color temperatures as a special order. LED not dimmable. LED module not field replaceable.
- Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **PA1A - PAT - STD - STD - 360 - FR - MO1-S3-12 - 120 - 12 - 131**