

# VISION-3 LIGHTING

## Metal Halide Dual Wall Mount **MODEL WM10** 39W Max. each lamp, Dual PAR20 Metal Halide 20W Max. each lamp, Dual GU6.5 Base T4 Metal Halide

### Specifications:

**Material:** Available in machined 6061-T6 aluminum or C36000 brass.

**Cap:** Machined caps come in seven styles, lock in place with one 18-8 stainless steel set screw, and are sealed to the body with a high temperature silicone O-ring. Regressed caps have drain holes for water drainage from top of lens. All caps accept up to three internal accessories, held in place by a stainless steel clip.

**Mount Canopy:** Available with the following mount options: MO3 (Machined Round Canopy), MO15 (Machined Square Canopy), and MO12 & MO13 (Surface Mount Powered Canopies). Stem is permanently attached to the mount canopy to prevent loosening. MO3 & MO15 mount options come mounted to a steel universal mounting ring for ease of mounting and adjustment on an industry standard round junction box (box and hardware not supplied). See mount specification sheets for more information. (Mount canopy must be mounted to an appropriate wall or junction box, in such a manner that is capable of holding the weight of the fixture. Junction box and hardware not included).


**Finish:** TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.

**Socket:** Two medium base porcelain sockets with nickel-plated copper contacts and 600V, 250° C, PTFE coated 18 ga leads (PAR20 lamps), or GU6.5 bi-pin porcelain sockets with nickel-plated copper contacts and 600V, 250° C, PFA coated 18 ga leads (T4 lamps).

**Lamp:** Two medium base PAR20 or GU6.5 base T4 Metal Halide lamps up to 39W (PAR20) or 20W (T4). (A remote ballast is required for each lamp).

**Lens:** Each cap contains a tempered, clear lens, secured with a high temperature, UV curing, silicone adhesive.

**Certification:** CSA tested & certified to US and Canadian safety standards per UL1598 & CSA C22.2 No. 250-08 for wet location wall mount use. (Must be mounted in such a manner to properly support the fixture.)

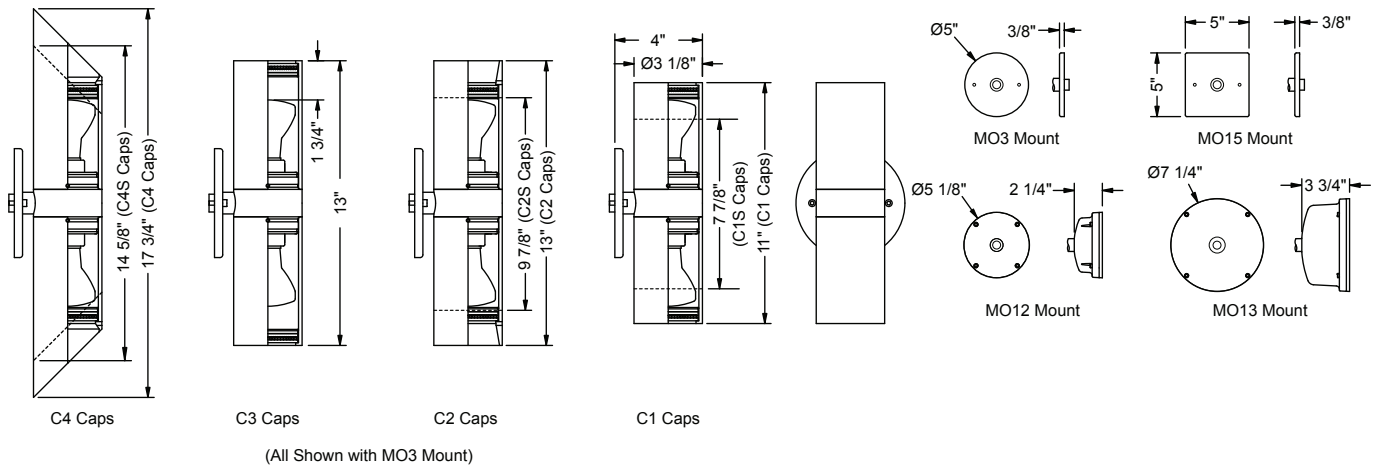

### Ordering Information:

Model	Finish	Cap <sup>1</sup> (Up/Down)	Mount <sup>2</sup>	Lamp Type <sup>3</sup>	Lamp <sup>3,4</sup> (Up/Down)	Lens Accy <sup>4</sup> (Up/Down)	Filter <sup>4</sup> (Up/Down)	Louver <sup>4</sup> (Up/Down)	Remote Ballast Catalog String
WM10A - Aluminum	BL - Black	Standard: C1 - Flush C2 - Regress Lens C3 - Regress Lamp C4 - 45° Angled  Short: C1S - Flush C2S - Regress Lens C4S - 45° Angled	MO3 - Round Canopy <sup>1</sup> MO15 - Square Canopy <sup>1</sup> MO12 - Surface Mount Canopy MO13 - Surface Mount Canopy	PAR20MH - PAR20 MH T4-SP - T4 MH w/ Spot Optics T4-NFL - T4 MH w/ Narrow Flood Optics T4-FL - T4 MH w/ Flood Optics	0 - None	0 - None	0 - None	0 - None	Fixture must be specified with one of the following remote ballasts: BM3 - In Ground Remote Ballast (39W only) (2 req'd) <sup>3</sup> BM4 - Wall Mount Remote Ballast (20W & 39W) (1 dual, or 2 single req'd) <sup>3</sup>
WM10B - Brass <sup>1</sup>	BLT - Textured Black				0 - None	L1 - Spread Lens	F1 - Red	H1 - Honeycomb Louver	
	BN - Bronze				T4 Metal Halide:	L2 - Linear Lens	F2 - Blue		
	BNT - Textured Bronze				101 - 20W, CMH20T	L3 - Softening Lens	F3 - Light Blue		
	BAT - Textured Bark				PAR20 Metal Halide:		F4 - Green		
	WI - White				32 - 39W, PAR20MH, 10° Spot		F5 - Amber		
	GRT - Textured Green				33 - 39W, PAR20MH, 30° Flood		F6 - Pink		

- Notes:**
- 'Short' caps can only be used with T4MH lamps. C1 and C3 cap options are not available when the WM10B is specified with a 39W lamp and MO3 or MO15 mounts.
  - See MO3, MO12, MO13, or MO15 specification sheet for mount details.
  - See ballast submittal for specifications, limitations, and correct catalog number logic. Ballast type and wattage must match lamp type and wattage.
  - Specify Cap, Lamp, Lens Accy, Filter, and Louver options for the up and down position. See ordering example below.
  - Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **WM10A - SI - C2/C4 - MO15 - PAR20MH - 32/32 - 0/L1 - F2/0 - H1/H1 - Ballast Catalog String**