

VISION-3

LIGHTING

Machined Round Canopy **MODEL MO3**

Specifications:


Canopy: Machined 6061-T6 aluminum, C36000 brass, or 304 stainless steel.

Fixture Mount: Available with single or dual fixture mounting holes. Non-threaded mounting hole option allows for versatility, while the threaded mounting hole option can be used for maximum strength (threaded mount hole option requires the use of a fixture with a 'Rotate and Lock Knuckle'). O-ring groove allows for sealing between fixture and mounting canopy (All Vision3 flood fixtures come with a high temperature, black Viton O-ring on the knuckle for this purpose).

Mounting: Canopy comes mounted to a steel universal mounting ring for ease

of mounting and adjustment on an industry standard round junction box (box, box hardware, and gasket not supplied).

Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged. Stainless steel model available in three additional metal finishes: Natural, Polished, and Brushed.

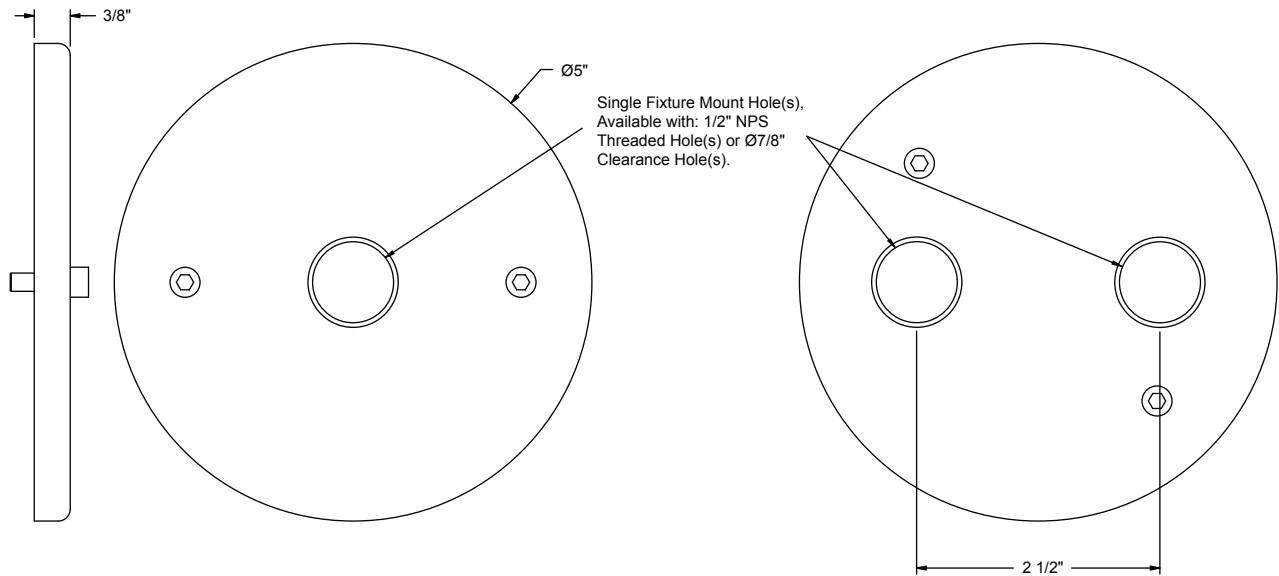

Ordering Information:

Model	Finish	Mount Hole
MO3A - Aluminum	BL - Black	S0 - Single Threaded Mount Hole
MO3B - Brass	BLT - Textured Black	S1 - Single Non-Threaded Mount Hole
MO3S - Stainless ¹	BN - Bronze	D0 - Dual Threaded Mount Hole ^{2,4}
	BNT - Textured Bronze	D1 - Dual Non-Threaded Mount Hole ^{3,4}
	BAT - Textured Bark	
	WI - White	
	GRT - Textured Green	
	SI - Silver	
	GY - Grey	
	BE - Beige	
	GNT - Textured Granite	
	SAT - Textured Sand	
	PAT - Textured Patina	
	EAT - Textured Earth	
	CLA - Clear Anodized (MO3A only)	
	NAT - Natural (MO3B & MO3S only)	
	POL - Polished (MO3B & MO3S only)	
	AGE - Aged (MO3B only)	
	BRU - Brushed (MO3S only)	

Notes:

1. Model MO3S available as a special order. Contact your Vision3 lighting CSR.
2. Dual threaded mount canopy for use with rear mount fixture heads with K2 knuckles only.
3. Dual non-threaded mount canopy for use with rear mount fixtures heads only.
4. Dual Mount hole canopies do not include steel universal mount ring.
5. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **MO3B - AGE - S1**