# 

## Installation Instructions

## INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS. IMPORTANT SAFETY INSTRUCTIONS. SAVE THESE INSTRUCTIONS.

#### (Failure to follow the warnings and instructions on this sheet could result in fire, injury, failure of product, and/or voiding of warranty.)

- Do not touch luminaire while lamp is on. Turn off/unplug and allow to cool before replacing lamp.
- 2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
- 3. Do not touch hot luminaire or mount option.
- 4. Keep lamp away from materials that may burn.
- 5. Do not touch lamp at any time. Use a soft cloth. Oil from your skin may damage lamp.
- 6. Do not operate the luminaire or mount option with damaged or missing parts.
- 7. Do not disassemble mount option.

#### Initial sizing of strap

- 1. Clip the Strap Hook on to the Base of the Ratcheting Buckle.
- 2. Place the Strap around the tree/pole. Ensure that the back of the
- Canopy is flush with the tree/pole, and the wiring hole is pointing down.
- 3. Slip the end of the Strap thru the slot in the Spool on the Ratcheting Buckle.
- 4. Pull the Strap end thru the slot so that that the Strap is slightly snug around the tree/pole, but leave enough slack so the Strap can be removed after initial sizing.
- 5. Tighten the Strap ( see Strap Adjustment ) so that it will hang under its own weight, but such that the Strap Hook can still be removed from the Base of the Ratcheting Buckle.
- 6. Remove Strap from tree/pole by un-attaching the Strap Hook from the Ratcheting Buckle.

#### Mounting Luminaire

- 1. Feed the two leads of the Luminaire thru the mount hole in the Canopy.
- 2. Insert the Luminaire knuckle into the Canopy mount hole.
- 3. Feed the two leads of the Luminaire thru the Lock Nut.
- 4. Tighten the Lock Nut to attach the Luminaire to the Canopy.


#### Electrical Connections

- 1. Feed the supply cable through the wiring hole on the bottom of the Canopy.
- Attach the supply cable to the Luminaire leads by using watertight connectors. Note: Check that the Luminaire and supply cable are rated for the supply power.
- 3. Tuck all wiring and connectors into the Canopy.

#### Final Mounting

- 1. Wrap the Strap/Luminaire assembly around the tree/pole at the desired height.
- 2. Clip the Strap Hook to the Base of the Ratcheting Buckle. There should be enough slack to do this from the initial sizing, if not, loosen the Strap as described in Strap Adjustment.
- Adjust the Canopy to the desired position by sliding along the Strap. Note: The initial sizing should allow the Strap/Luminaire assembly to hang under its own weight, but still allow adjustment of the Canopy. If not, loosen or tighten accordingly, as described in Strap Adjustment.
- 4. Tighten the Strap by pulling the Handle on the Ratcheting Buckle. Tighten just enough to snug up the Strap. Note: Do not over tighten as this will cause increased wear on the Strap!
- 5. Wrap the loose Strap end around the Ratcheting Buckle.
- 6. Secure the power supply cable to the tree/pole appropriately.
- 7. Periodically check Strap for fit and wear. Factors such as Strap stretch or tree growth may make periodic adjustments necessary. Tighten or loosen as required. Replace any Strap that becomes worn.

- 8. Do not install luminaire within 10 feet of a pool, spa, or fountain.9. Have luminaire and mount option installed in accordance with all
  - applicable installation codes and standards by a person familiar with the construction and operation of the fixture and the hazards involved.
  - 10. For use with low voltage lighting fixtures and remote transformers only.
  - Use only cable rated for low voltage. Cable buried more than 6" must be suitable for direct burial. Direct burial cable may be ordered from Vision3 Lighting.

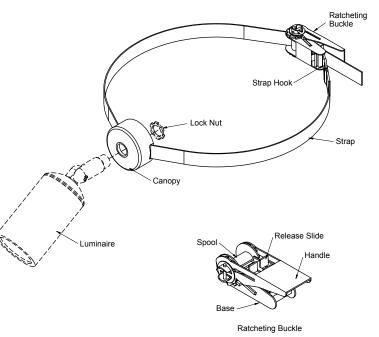

### Strap Adjustment

- To Tighten
- 1. Pull Handle on Ratcheting Buckle open.
- 2. Push Handle closed to tighten Strap. Tighten just enough to snug up the Strap. Note: Do not over tighten as this will cause increased wear on the Strap!

#### To Loosen

- 1. Pull the Handle on the Ratcheting Buckle open.
- 2. Pull the Release Slide on the Ratcheting Buckle Handle and open the Handle as far as it will go. Caution!! This may cause the Strap to unwind. Be prepared to hold the weight of the Luminaire.
- 3. If the Strap does not loosen on its own, pull the Ratcheting Bracket away from the tree/pole to loosen.
- 4. Pull the Release Slide and close the Handle on the Ratcheting Buckle.